

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicants:	B. Kim et al.	Attorney Docket No.:	SEMT119849
Application No.:	10/700,782	Art Unit:	1753 / Confirmation No: 5493
Filed:	November 3, 2003	Examiner:	E. Wong
Title:	BATH AND METHOD FOR HIGH RATE COPPER DEPOSITION		

DECLARATION OF BIOH KIM UNDER 37 C.F.R. § 1.131

Seattle, Washington 98101

October 19, 2007

TO THE COMMISSIONER FOR PATENTS:

I, Bioh Kim, declare as follows:

1. I am an engineer residing in Milford, Connecticut, and a former employee of Semitool, Inc., the assignee of the above-identified application. In connection with and during the period of my employment with Semitool, Inc., I invented the claimed subject matter currently pending in the above-identified application.

2. I have reviewed the specification and the claims currently pending in the above-identified application. The claims are directed to a process for electroplating copper on a microelectronic workpiece in a through-mask plating application at a rate of at least 2  $\mu\text{m}/\text{minute}$ .

3. Having reviewed the claims, I verily believe that I conceived and reduced to practice the subject matter falling within the claims currently pending in the above-identified application prior to March 30, 2001.

4. To demonstrate such conception and reduction to practice, I attach hereto as Exhibit A, an invention disclosure, attention specifically called to pages 12-13 and 16-19, which I prepared and signed (and which was witnessed by Zhongmin Hu) disclosing baths and methods for high rate copper deposition. With reference to these examples, FC99 includes a wetting

LAW OFFICES OF  
CHRISTENSEN O'CONNOR JOHNSON KINDNESS<sup>PLLC</sup>  
1420 Fifth Avenue  
Suite 2800  
Seattle, Washington 98101  
206.682.8100

agent (see, for example, page 12); Shipley B2001 includes a brightener (see, for example, page 13, column 2); and Shipley C2001 includes a leveler and a suppressor (see, for example, page 13, column 3).

5. Exhibit A lists dates of conception, written description, and first sketch or drawing (all redacted), all prior to March 30, 2001. In addition, Exhibit A lists the date that a working model was prepared (also redacted), which is also prior to March 30, 2001.

6. I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true and, further, that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Dated: Oct, 19<sup>th</sup>, 2007.

Respectfully submitted,

  
\_\_\_\_\_  
Bioh Kin

ECP:dmg

LAW OFFICES OF  
CHELSEA TENSEI O'CONNOR JOHNSON KINDNESS<sup>SM</sup>  
1420 Fifth Avenue  
Suite 2800  
Seattle, Washington 98101  
206.682.8100

## EXHIBIT A

DDI 0048

# INVENTION DISCLOSURE

SEMITOOL, INC.

D99-\_\_\_\_\_

IN CASE OF MULTIPLE INVENTORS: GET PAGE 2 OF THIS DISCLOSURE;  
EACH INVENTOR MUST FILL OUT INVENTOR INFORMATION.

- Note:
1. Use Ink or Type Only
  2. Do not erase errors. Line through any errors, initial and date.
  3. Describe invention with drawings, sketches, etc. and a written explanation. Drawings may be below or attached. If attached, the inventor(s) and witnesses must sign and date each sheet.
  4. Describe the advantages of this invention compared to the current approach, if any.
  5. Inventor(s) and two (2) witnesses must sign and date each sheet.
  6. Send original signed documents to the Intellectual Property Department. Retain a personal copy.

Inventor's Full Name (include middle initial, jr., sr., I, II, etc.)

Bioh Kim

☐

Check Box if there is more than one inventor (use page two of disclosure for additional inventors)

Inventor's Physical Home Address: 117 Sunburst Ct, Kalispell, MT, 59901

Inventor's Citizenship: Seoul, Rep. of Korea

Title of Invention: Bath and method for high rate copper deposition for bumping application

Tool or Process: Semitool's Equinox or LT

Division: ATG

If Other, describe:

Invention:

Sketch, Explanation and Advantages: Refer to the attached.

Signature(s) of Inventor(s):


Date:

Date of Conception:

Date of First Sketch/Drawing:









Witnessed and Understood By:

Date:

Date of Written Description: Working Model Prepared?







☒ Yes / ☐ No

Date:  ~ May

REDACTED

## Bath and Method for High Rate Copper Deposition for Bumping Application

██████ Bioh Kim

The most commonly used solders for flip-chip application is eutectic lead-tin (63/37) alloy, eutectic tin-silver (96.5/3.5), eutectic tin-copper (99.3/0.7) and near-eutectic tin-silver-copper (Sn/3.5-4.5Ag/0.3-0.9Cu) alloys. In most cases, a thick copper layer, so-called copper mini-bump, is deposited to provide a wettable surface on the top of an unwettable diffusion barrier as well as to form a bonding layer through the reaction with the active element (tin) of the solder. Sn-Cu metallurgical intermetallic compounds are formed during the reflow process. Electrodeposition is the easiest and cheapest way to deposit a thick copper. The biggest shortcomings of this technology are the process time required to deposit thick copper bumps and the incorporation of additives in the film.

To date, the deposition rate of 0.4~1.0  $\mu\text{m}/\text{min}$ , which is not enough for bumping applications, is generally achievable with the commercial copper bath for interconnect (such as via, trench, and dual damascene) applications. Another problem of this bath is originated from the high concentration of organic components, especially high concentration of suppressors. The inclusion of organic additives in the bath has a potential disadvantage in subsequent processing. Organic materials or their decomposition products can be incorporated into the deposit. Organic materials incorporated into the deposit can have an undesirable influence on some deposit properties in electronic applications. For instance, when solder is reflowed, incorporated organic additives may segregate to grain boundaries on the surface where they can adversely influence the mechanical properties, porosity, and/or wettability of the solder.


Accordingly, the purpose of this invention is to get the bath and process conditions for high deposition rate (4~6 $\mu\text{m}/\text{min}$ ) and smooth surface. Details are as follows.

- a. Effect of bath components on deposition rate (limiting current density) through cathodic polarization : copper, sulfuric acid, chloride
- b. Effect of current density on the growth shape and surface morphology
- c. Effect of temperature on the growth shape and surface morphology
- d. Effect of mass flow rate on the growth shape and surface morphology
- e. Effect of each additive (accelerator and suppressor) on the growth shape and surface morphology
- f. Effect of waveform on the growth shape and surface morphology
- g. Optimization of the thickness uniformity using CFD reactor (at 4 to 6 $\mu\text{m}/\text{min}$ )

The target deposition rate of this invention is 4~6 $\mu\text{m}/\text{min}$  with the thickness uniformity less than 10% (3-sigma and K-value).

REDACTED

## High Rate Copper for Mini-Bump Applications

 Bioh Kim

### DONE

1. **Define limiting current density as a function of bath composition by cathodic polarization**  
Effect of copper, sulfuric acid, and chloride concentration  
Tested 36 kinds of baths : 4 levels of copper concentration, 3 levels of sulfuric concentration  
and 3 levels of chloride concentration
2. **Wafer level tests**  
Wafer level tests of bath 12 and 8 : Bath 12 showed much better results.
3. **Adjust the concentration of major components for better bath stability**  
Copper, sulfuric acid, and chloride concentration
4. **Define the relation between current density and deposition rate**  
 $50 \sim 55 \text{ mA/cm}^2 \cong 1 \mu\text{m/min}$   
Maximum available deposition rate  $\cong 5 \sim 6 \mu\text{m/min}$  (dependent on wafer size and patterns)
5. **Surface morphology as a function of process conditions**  
Current density, flow rate, and temperature
6. **Define the effect of additives on surface morphology : components and concentration**  
Shipley B-2001 : brightener  
Shipley C-2001 : suppressor  
Shipley wetter B : wetting agent  
FC 99 : wetting agent
7. **Define the effect of waveform on the morphology**  
With additive-free bath and additive-containing bath


### REMAINDERS

1. **Finalize bath components and composition**  
Test the effect of Enthone MD and LO on surface morphology  
(for comparing with Shipley B-2001 and C-2001)  
Test other wetting agent from Ciba (because of the discontinuation of FC series from 3M)
2. **Test effect of impinging flow at the center of wafer**  
Test new hardware to boost mass flow at the center of wafer
3. **Optimize thickness uniformity**  
With CFD reactor
4. **Setup POR : CFD reactor, deposition rate of  $5 \sim 6 \mu\text{m/min}$**

REDACTED

1. Effect of bath components on deposition rate (limiting current density) through cathodic polarization

To increase the operational current density of copper bump plating, the effect of process conditions on the diffusion-limited current density was investigated using copper sulfate bath. This research focused mainly on the effect of the component concentration including copper ions, sulfuric acid, and additive (chloride). In order to define the diffusion-limited current density of each system, cathodic polarization with EG&G potentiostat was utilized. The diffusion-limited current density was increased either by increasing metal concentration, by decreasing sulfuric concentration or by increasing the ratio of metal to acid.

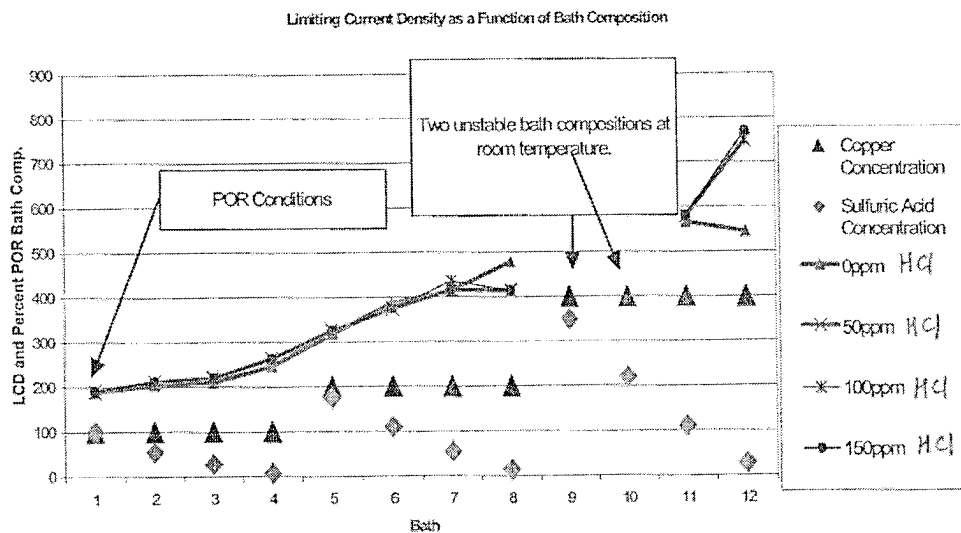


Bath	CuSO4 g/L	Cu g/L	H2SO4 ml/L	Ratio Acid: Copper	Conductivity mS
1	62.40	15.89	82.96	7.36	416
2	62.40	15.89	52.18	5	284
3	62.40	15.89	26.09	3	160
4	62.40	15.89	6.52	1.5	54
5	124.80	31.77	165.92	7.36	559
6	124.80	31.77	104.35	5	456
7	124.80	31.77	52.18	3	272
8	124.80	31.77	13.04	1.5	86
9	249.60	63.55	331.84	7.36	557
10	249.60	63.55	208.71	5	637
11	249.60	63.55	104.35	3	416
12	249.60	63.55	26.09	1.5	151


Define limiting current density by plating

Bath 12 (with 50ppm HCl), BDTV1 wafers, 5.5GPM, 60RPM, 25°C, No oscillation



430mA/cm<sup>2</sup>

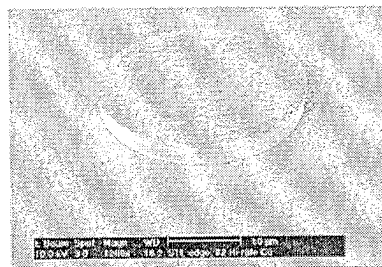



370mA/cm<sup>2</sup>

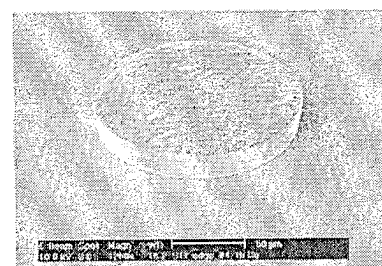

335mA/cm<sup>2</sup>

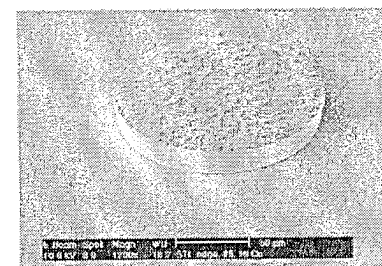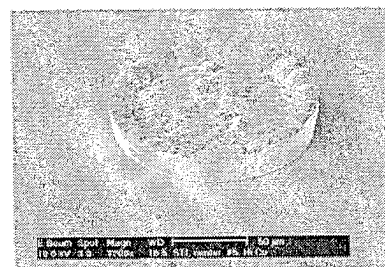

225mA/cm<sup>2</sup>

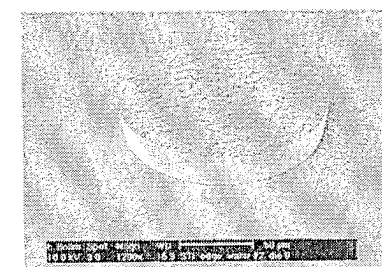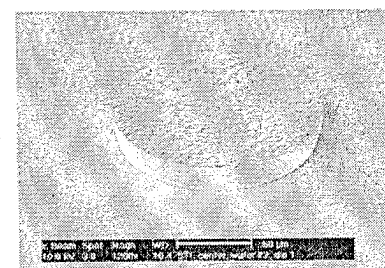

Center



Edge

In this condition, the limiting current density was found above 335mA/cm<sup>2</sup>. As the center of the wafer has low mass transport rate, this area reached the limiting current density earlier than other areas.





Bath 8 (with 50ppm HCl), BDTV1 wafers, 5.5GPM, 60RPM, 25°C, No oscillation

225mA/cm<sup>2</sup>

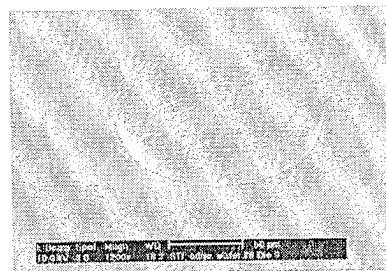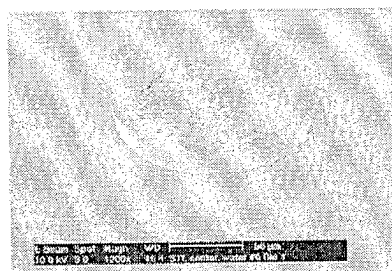

168mA/cm<sup>2</sup>

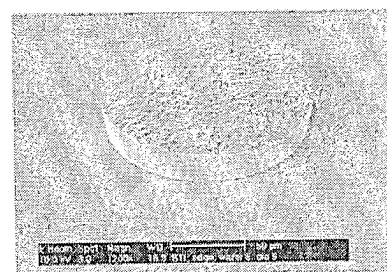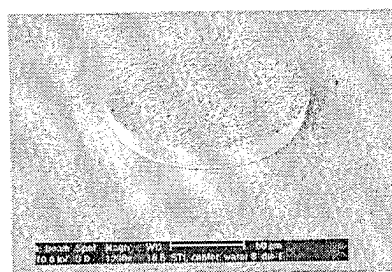

Center

Edge

In this condition, the limiting current density was found above 225mA/cm<sup>2</sup>.

2. Effect of current density on the growth shape and surface morphology  
(with conventional reactor and modified bath 12)

With increasing the current density,

- a. The growth mechanism was more affected by mass transport  
; waviness of surface and increased thickness deviation between center and edge
- b. The surface became smoother.

Bath

- a. Copper sulfate : 250g/L
- b. Sulfuric acid : 65g/L
- c. HCl : 50ppm

Process Conditions

- a. 5.5 GPM
- b. 60 RPM
- c. 25 °C
- d. No oscillation (in order to see the effect of mass flow direction)
- e. POR diffuser
- f. BDTV2 wafers

[illegible]

A large, circular, textured object, possibly a lens or a piece of equipment, with a ruler at the bottom for scale.

100 nm


A large, circular, textured object, possibly a lens or a piece of material, is shown. Below it is a ruler with markings in inches and centimeters. The object has a fine, granular texture and a slightly irregular, circular shape. The ruler is placed horizontally below the object, with the 0-inch mark on the left and the 1-inch mark on the right. The object's diameter is approximately 1.5 inches.

1.5 μm

in

Learn More About Us Today! Call 1-800-854-2222 or visit our website at [www.3M.com](http://www.3M.com)


1. 4000 2. 4000 3. 4000 4. 4000 5. 4000 6. 4000 7. 4000 8. 4000 9. 4000 10. 4000 11. 4000 12. 4000 13. 4000 14. 4000 15. 4000 16. 4000 17. 4000 18. 4000 19. 4000 20. 4000 21. 4000 22. 4000 23. 4000 24. 4000 25. 4000 26. 4000 27. 4000 28. 4000 29. 4000 30. 4000 31. 4000 32. 4000 33. 4000 34. 4000 35. 4000 36. 4000 37. 4000 38. 4000 39. 4000 40. 4000 41. 4000 42. 4000 43. 4000 44. 4000 45. 4000 46. 4000 47. 4000 48. 4000 49. 4000 50. 4000 51. 4000 52. 4000 53. 4000 54. 4000 55. 4000 56. 4000 57. 4000 58. 4000 59. 4000 60. 4000 61. 4000 62. 4000 63. 4000 64. 4000 65. 4000 66. 4000 67. 4000 68. 4000 69. 4000 70. 4000 71. 4000 72. 4000 73. 4000 74. 4000 75. 4000 76. 4000 77. 4000 78. 4000 79. 4000 80. 4000 81. 4000 82. 4000 83. 4000 84. 4000 85. 4000 86. 4000 87. 4000 88. 4000 89. 4000 90. 4000 91. 4000 92. 4000 93. 4000 94. 4000 95. 4000 96. 4000 97. 4000 98. 4000 99. 4000 100. 4000



Source: Carol M. Smith, Seattle, Washington, 1980  
 1984-01-1000-0117-01A, Seattle, Washington, 1980


1. **Author** \_\_\_\_\_  
 2. **Title** \_\_\_\_\_  
 3. **Editor** \_\_\_\_\_  
 4. **Printer** \_\_\_\_\_  
 5. **Place** \_\_\_\_\_  
 6. **Year** \_\_\_\_\_  
 7. **Price** \_\_\_\_\_  
 8. **Notes** \_\_\_\_\_  
 9. **Index** \_\_\_\_\_  
 10. **Subject** \_\_\_\_\_  
 11. **Class** \_\_\_\_\_  
 12. **Number** \_\_\_\_\_  
 13. **Volume** \_\_\_\_\_  
 14. **Page** \_\_\_\_\_  
 15. **Chapter** \_\_\_\_\_  
 16. **Section** \_\_\_\_\_  
 17. **Paragraph** \_\_\_\_\_  
 18. **Line** \_\_\_\_\_  
 19. **Word** \_\_\_\_\_  
 20. **Letter** \_\_\_\_\_  
 21. **Digit** \_\_\_\_\_  
 22. **Symbol** \_\_\_\_\_  
 23. **Character** \_\_\_\_\_  
 24. **Mark** \_\_\_\_\_  
 25. **Sign** \_\_\_\_\_  
 26. **Figure** \_\_\_\_\_  
 27. **Table** \_\_\_\_\_  
 28. **Diagram** \_\_\_\_\_  
 29. **Image** \_\_\_\_\_  
 30. **Figure** \_\_\_\_\_  
 31. **Table** \_\_\_\_\_  
 32. **Diagram** \_\_\_\_\_  
 33. **Image** \_\_\_\_\_  
 34. **Figure** \_\_\_\_\_  
 35. **Table** \_\_\_\_\_  
 36. **Diagram** \_\_\_\_\_  
 37. **Image** \_\_\_\_\_  
 38. **Figure** \_\_\_\_\_  
 39. **Table** \_\_\_\_\_  
 40. **Diagram** \_\_\_\_\_  
 41. **Image** \_\_\_\_\_  
 42. **Figure** \_\_\_\_\_  
 43. **Table** \_\_\_\_\_  
 44. **Diagram** \_\_\_\_\_  
 45. **Image** \_\_\_\_\_  
 46. **Figure** \_\_\_\_\_  
 47. **Table** \_\_\_\_\_  
 48. **Diagram** \_\_\_\_\_  
 49. **Image** \_\_\_\_\_  
 50. **Figure** \_\_\_\_\_  
 51. **Table** \_\_\_\_\_  
 52. **Diagram** \_\_\_\_\_  
 53. **Image** \_\_\_\_\_  
 54. **Figure** \_\_\_\_\_  
 55. **Table** \_\_\_\_\_  
 56. **Diagram** \_\_\_\_\_  
 57. **Image** \_\_\_\_\_  
 58. **Figure** \_\_\_\_\_  
 59. **Table** \_\_\_\_\_  
 60. **Diagram** \_\_\_\_\_  
 61. **Image** \_\_\_\_\_  
 62. **Figure** \_\_\_\_\_  
 63. **Table** \_\_\_\_\_  
 64. **Diagram** \_\_\_\_\_  
 65. **Image** \_\_\_\_\_  
 66. **Figure** \_\_\_\_\_  
 67. **Table** \_\_\_\_\_  
 68. **Diagram** \_\_\_\_\_  
 69. **Image** \_\_\_\_\_  
 70. **Figure** \_\_\_\_\_  
 71. **Table** \_\_\_\_\_  
 72. **Diagram** \_\_\_\_\_  
 73. **Image** \_\_\_\_\_  
 74. **Figure** \_\_\_\_\_  
 75. **Table** \_\_\_\_\_  
 76. **Diagram** \_\_\_\_\_  
 77. **Image** \_\_\_\_\_  
 78. **Figure** \_\_\_\_\_  
 79. **Table** \_\_\_\_\_  
 80. **Diagram** \_\_\_\_\_  
 81. **Image** \_\_\_\_\_  
 82. **Figure** \_\_\_\_\_  
 83. **Table** \_\_\_\_\_  
 84. **Diagram** \_\_\_\_\_  
 85. **Image** \_\_\_\_\_  
 86. **Figure** \_\_\_\_\_  
 87. **Table** \_\_\_\_\_  
 88. **Diagram** \_\_\_\_\_  
 89. **Image** \_\_\_\_\_  
 90. **Figure** \_\_\_\_\_  
 91. **Table** \_\_\_\_\_  
 92. **Diagram** \_\_\_\_\_  
 93. **Image** \_\_\_\_\_  
 94. **Figure** \_\_\_\_\_  
 95. **Table** \_\_\_\_\_  
 96. **Diagram** \_\_\_\_\_  
 97. **Image** \_\_\_\_\_  
 98. **Figure** \_\_\_\_\_  
 99. **Table** \_\_\_\_\_  
 100. **Diagram** \_\_\_\_\_  
 101. **Image** \_\_\_\_\_  
 102. **Figure** \_\_\_\_\_  
 103. **Table** \_\_\_\_\_  
 104. **Diagram** \_\_\_\_\_  
 105. **Image** \_\_\_\_\_  
 106. **Figure** \_\_\_\_\_  
 107. **Table** \_\_\_\_\_  
 108. **Diagram** \_\_\_\_\_  
 109. **Image** \_\_\_\_\_  
 110. **Figure** \_\_\_\_\_  
 111. **Table** \_\_\_\_\_  
 112. **Diagram** \_\_\_\_\_  
 113. **Image** \_\_\_\_\_  
 114. **Figure** \_\_\_\_\_  
 115. **Table** \_\_\_\_\_  
 116. **Diagram** \_\_\_\_\_  
 117. **Image** \_\_\_\_\_  
 118. **Figure** \_\_\_\_\_  
 119. **Table** \_\_\_\_\_  
 120. **Diagram** \_\_\_\_\_  
 121. **Image** \_\_\_\_\_  
 122. **Figure** \_\_\_\_\_  
 123. **Table** \_\_\_\_\_  
 124. **Diagram** \_\_\_\_\_  
 125. **Image** \_\_\_\_\_  
 126. **Figure** \_\_\_\_\_  
 127. **Table** \_\_\_\_\_  
 128. **Diagram** \_\_\_\_\_  
 129. **Image** \_\_\_\_\_  
 130. **Figure** \_\_\_\_\_  
 131. **Table** \_\_\_\_\_  
 132. **Diagram** \_\_\_\_\_  
 133. **Image** \_\_\_\_\_  
 134. **Figure** \_\_\_\_\_  
 135. **Table** \_\_\_\_\_  
 136. **Diagram** \_\_\_\_\_  
 137. **Image** \_\_\_\_\_  
 138. **Figure** \_\_\_\_\_  
 139. **Table** \_\_\_\_\_  
 140. **Diagram** \_\_\_\_\_  
 141. **Image** \_\_\_\_\_  
 142. **Figure** \_\_\_\_\_  
 143. **Table** \_\_\_\_\_  
 144. **Diagram** \_\_\_\_\_  
 145. **Image** \_\_\_\_\_  
 146. **Figure** \_\_\_\_\_  
 147. **Table** \_\_\_\_\_  
 148. **Diagram** \_\_\_\_\_  
 149. **Image** \_\_\_\_\_  
 150. **Figure** \_\_\_\_\_  
 151. **Table** \_\_\_\_\_  
 152. **Diagram** \_\_\_\_\_  
 153. **Image** \_\_\_\_\_  
 154. **Figure** \_\_\_\_\_  
 155. **Table** \_\_\_\_\_  
 156. **Diagram** \_\_\_\_\_  
 157. **Image** \_\_\_\_\_  
 158. **Figure** \_\_\_\_\_  
 159. **Table** \_\_\_\_\_  
 160. **Diagram** \_\_\_\_\_  
 161. **Image** \_\_\_\_\_  
 162. **Figure** \_\_\_\_\_  
 163. **Table** \_\_\_\_\_  
 164. **Diagram** \_\_\_\_\_  
 165. **Image** \_\_\_\_\_  
 166. **Figure** \_\_\_\_\_  
 167. **Table** \_\_\_\_\_  
 168. **Diagram** \_\_\_\_\_  
 169. **Image** \_\_\_\_\_  
 170. **Figure** \_\_\_\_\_  
 171. **Table** \_\_\_\_\_  
 172. **Diagram** \_\_\_\_\_  
 173. **Image** \_\_\_\_\_  
 174. **Figure** \_\_\_\_\_  
 175. **Table** \_\_\_\_\_  
 176. **Diagram** \_\_\_\_\_  
 177. **Image** \_\_\_\_\_  
 178. **Figure** \_\_\_\_\_  
 179. **Table** \_\_\_\_\_  
 180. **Diagram** \_\_\_\_\_  
 181. **Image** \_\_\_\_\_  
 182. **Figure** \_\_\_\_\_  
 183. **Table** \_\_\_\_\_  
 184. **Diagram** \_\_\_\_\_  
 185. **Image** \_\_\_\_\_  
 186. **Figure** \_\_\_\_\_  
 187. **Table** \_\_\_\_\_  
 188. **Diagram** \_\_\_\_\_  
 189. **Image** \_\_\_\_\_  
 190. **Figure** \_\_\_\_\_  
 191. **Table** \_\_\_\_\_  
 192. **Diagram** \_\_\_\_\_  
 193. **Image** \_\_\_\_\_  
 194. **Figure** \_\_\_\_\_  
 195. **Table** \_\_\_\_\_  
 196. **Diagram** \_\_\_\_\_  
 197. **Image** \_\_\_\_\_  
 198. **Figure** \_\_\_\_\_  
 199. **Table** \_\_\_\_\_  
 200. **Diagram** \_\_\_\_\_  
 201. **Image** \_\_\_\_\_  
 202. **Figure** \_\_\_\_\_  
 203. **Table** \_\_\_\_\_  
 204. **Diagram** \_\_\_\_\_  
 205. **Image** \_\_\_\_\_  
 206. **Figure** \_\_\_\_\_  
 207. **Table** \_\_\_\_\_  
 208. **Diagram** \_\_\_\_\_  
 209. **Image** \_\_\_\_\_  
 210. **Figure** \_\_\_\_\_  
 211. **Table** \_\_\_\_\_  
 212. **Diagram** \_\_\_\_\_  
 213. **Image** \_\_\_\_\_  
 214. **Figure** \_\_\_\_\_  
 215. **Table** \_\_\_\_\_  
 216. **Diagram** \_\_\_\_\_  
 217. **Image** \_\_\_\_\_  
 218. **Figure** \_\_\_\_\_  
 219. **Table** \_\_\_\_\_  
 220. **Diagram** \_\_\_\_\_  
 221. **Image** \_\_\_\_\_  
 222. **Figure** \_\_\_\_\_  
 223. **Table** \_\_\_\_\_  
 224. **Diagram** \_\_\_\_\_  
 225. **Image** \_\_\_\_\_  
 226. **Figure** \_\_\_\_\_  
 227. **Table** \_\_\_\_\_  
 228. **Diagram** \_\_\_\_\_  
 229. **Image** \_\_\_\_\_  
 230. **Figure** \_\_\_\_\_  
 231. **Table** \_\_\_\_\_  
 232. <

DAVID ET AL. / JOURNAL OF INTERPERSONAL VIOLENCE 27(10)



THE  
BOOK OF  
THE  
MAGICAL  
MAGNET

A large, circular, textured object, possibly a lens or a piece of material, with a ruler placed below it for scale.





3. Effect of temperature on the growth shape and surface morphology  
(with conventional reactor)



Process Conditions : 5.5 GPM, 60 RPM, No oscillation, POR diffuser, BDTV1 wafers

Bath 12, >4um/min

25°C

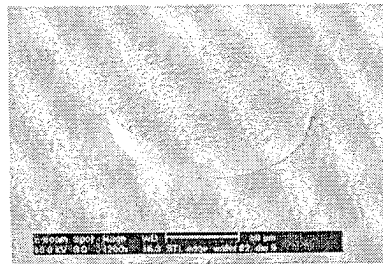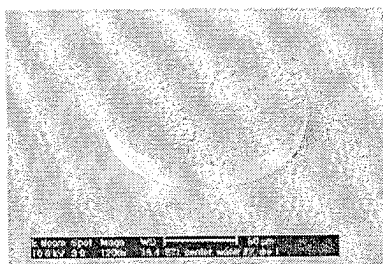

50°C

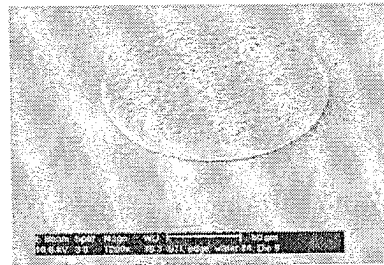
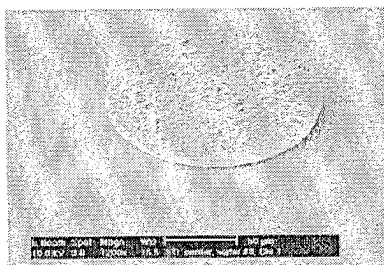


Center



Edge

Bath 12, >6um/min

25°C

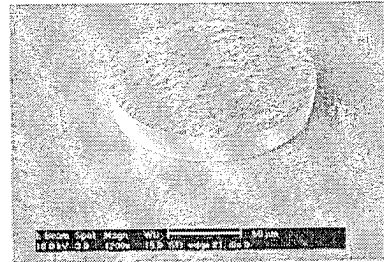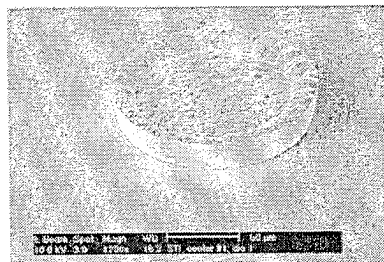

50°C

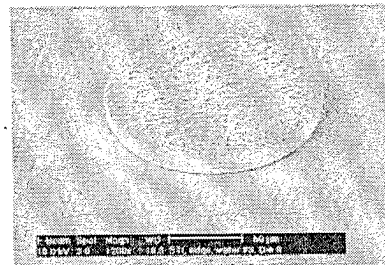
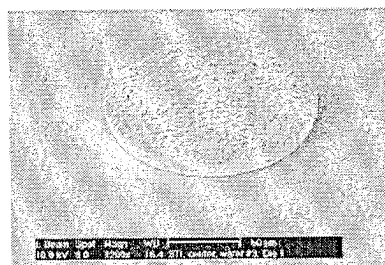


Center



Edge

Bath 8, >4um/min

25°C

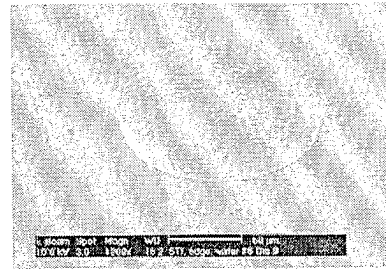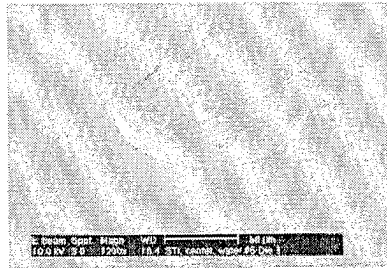

50°C

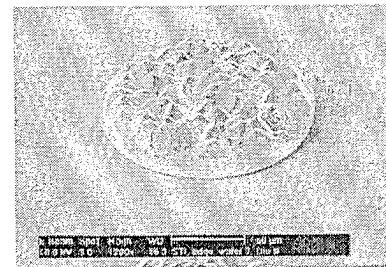
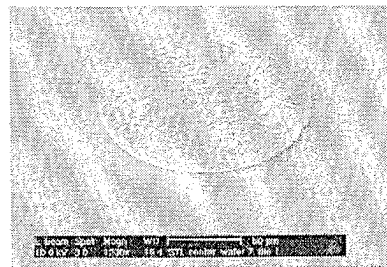


Center


Edge

Bath 8, >3um/min

25°C

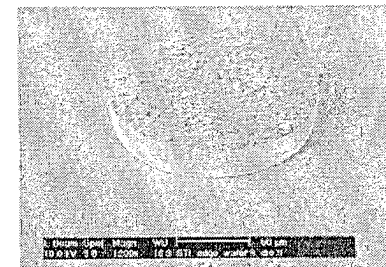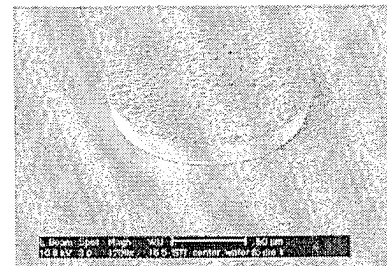

50°C

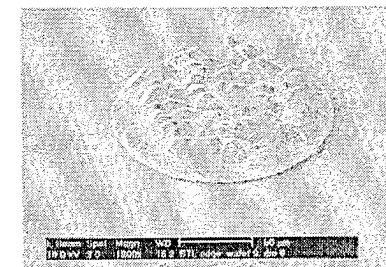


Center

Edge

As can be seen from the above figures, the difference between center and edge was reduced, but the rougher surface was obtained at high temperature.

4. Effect of mass flow rate on the growth shape and surface morphology (with conventional reactor)

Process Conditions : 60 RPM, 25 °C, No oscillation, POR diffuser, BDTV1 wafers,  
Bath 8

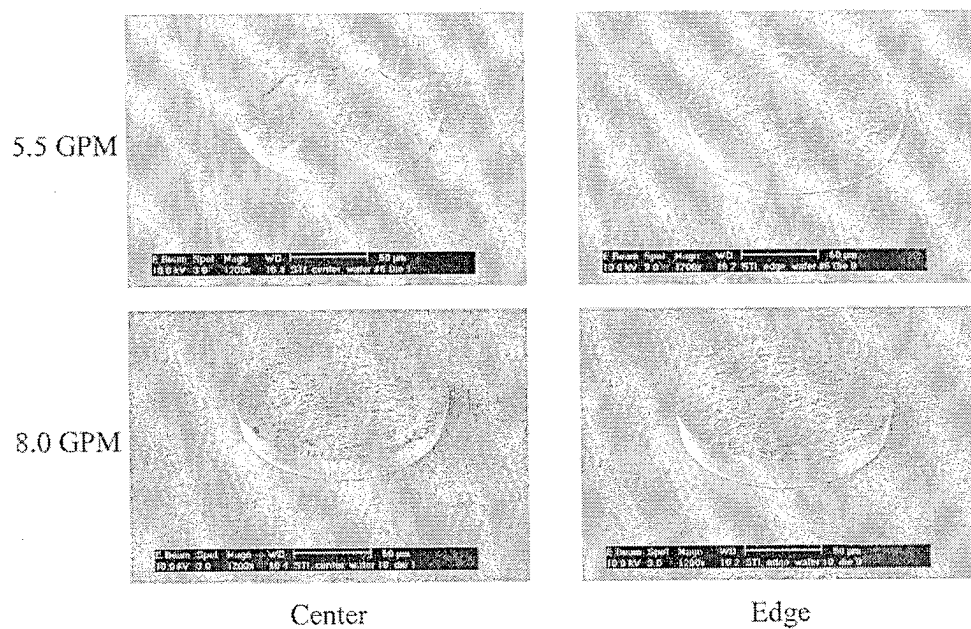

As can be seen from the above figures, there was no significant effect of mass flow rate on the morphology, because 5.5 gpm is already high enough.

5. Effect of additives on the growth shape and surface morphology  
(with conventional reactor)

Process Conditions : 6GPM, 60RPM, 30°C, 20 second oscillation, modified diffuser,  
BDTV1 wafers, modified bath 12

Bath

- a. Copper sulfate : 250g/L
- b. Sulfuric acid : 65g/L
- c. HCl : 50ppm
- d. FC99 : 2ml/L




As can be seen from the figures,

- a. Additive free bath : rough surface
- b. Bath containing accelerator : smoother but not regular
- c. Bath containing accelerator and suppressor : much smoother but crater formation, resist changed hydrophobic after plating, resulting in the difficulty of consecutive plating





Deposition rate : 4um/min

Center





Edge






Deposition rate : 5um/min

Center





Edge





Deposition rate : 6um/min

Center



Edge



No Additives

With accelerator  
(Shipley B2001 3ml/L)

With accelerator and  
suppressor  
(Shipley B2001 3ml/L+  
Shipley C2001 22ml/L)



### Effect of the concentration of accelerator on surface morphology

Process Conditions : 5.5GPM, 60RPM, 25°C, No oscillation, standard diffuser, BDTV2 wafers, modified bath 12

#### Bath

- a. Copper sulfate : 250g/L
- b. Sulfuric acid : 65g/L
- c. HCl : 50ppm
- d. B2001 : 1.5, 3.0 and 4.5ml/L

As the bath that contains accelerator looks promising, the effect of accelerator concentration was tested with another type of wafers. The results said the effect of concentration is negligible.

As can be seen, the surface is quite smooth, but still has macroscopic roughness on the surface.

4um/min                      5um/min                      6um/min

6um/min

6. Effect of waveform on the growth shape and surface morphology  
(with conventional reactor)

Process Conditions : 6GPM, 60RPM, 30°C, 20 second oscillation, modified diffuser,  
BDTV1 wafers, modified bath 12

Bath

- a. Copper sulfate : 250g/L
- b. Sulfuric acid : 65g/L
- c. HCl : 50ppm
- d. FC99 : 2ml/L

Effect of pulse condition can be summarized as follows.



- a. In case of additive-free bath, the surface became more faceted and rougher by using pulse plating.
- b. In case of accelerator-containing bath, the surface became smoother by using proper pulse conditions.
- c. In case of suppressor-containing bath, the surface morphology looks better by pulse plating. The surface irregularity (waviness, crater) was not significantly improved by changing waveform.

From the results so far, the best morphology can be obtained by pulse plating with accelerator-containing bath. In case of suppressor containing bath, the resulting high concentration of impurity in the film can adversely influence the mechanical properties, porosity, and/or wettability of the solder. The change of resist surface (hydrophilic to hydrophobic) can make another dewetting problem in case of consecutive plating. (for example, cu/solder)



## Additive-free bath

4um/min

Center

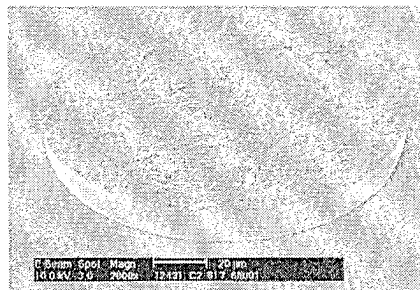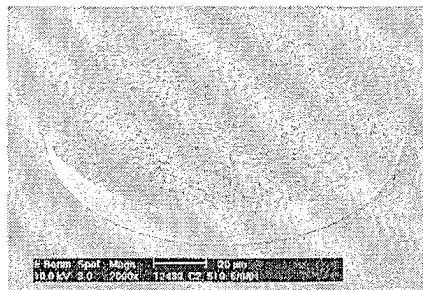

Edge

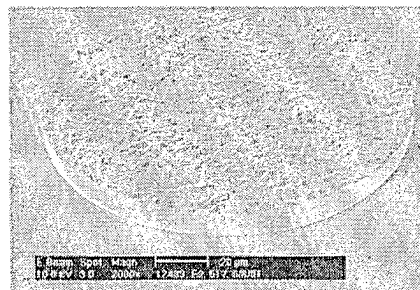
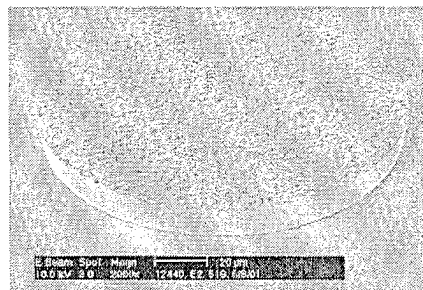


DC



20%, 100Hz

5um/min

Center

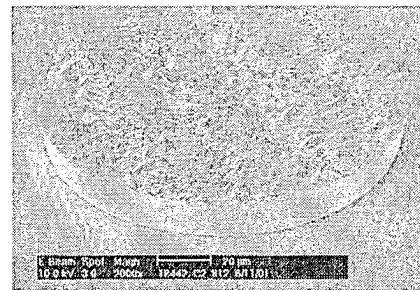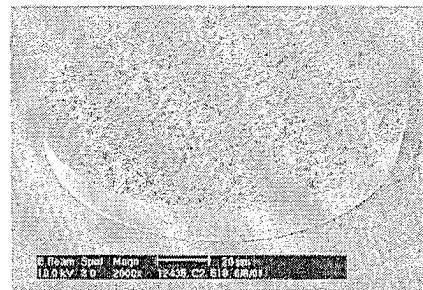

Edge

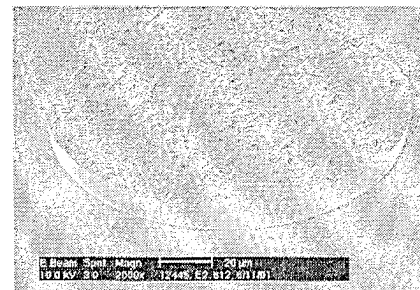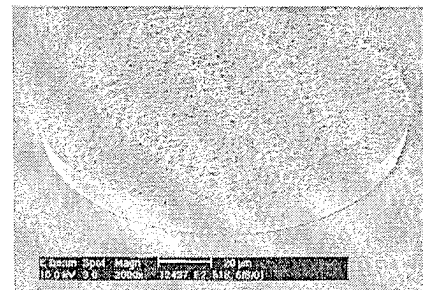



DC

50%, 100Hz




# Accelerator and Suppressor-Containing Bath

4um/min

Center

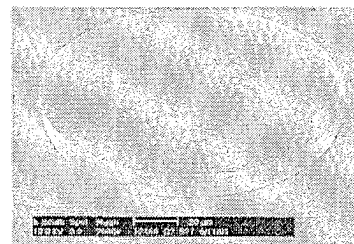
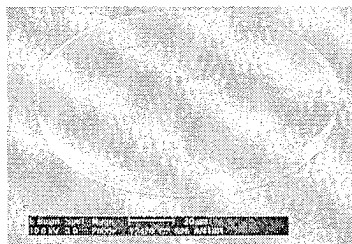


Edge

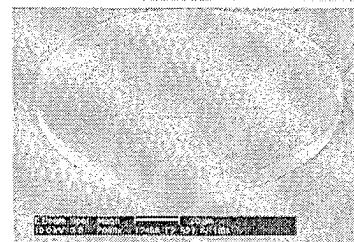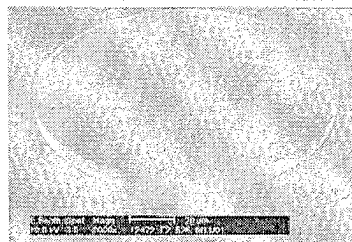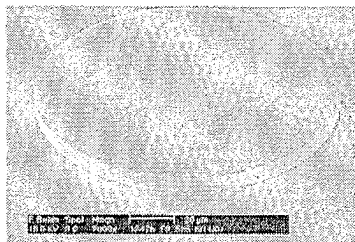


5um/min

Center

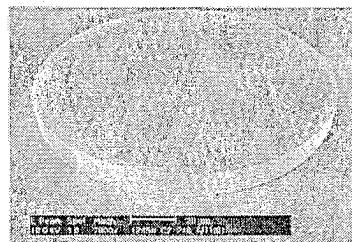
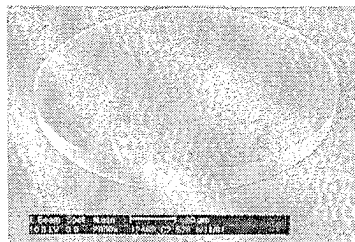


Edge


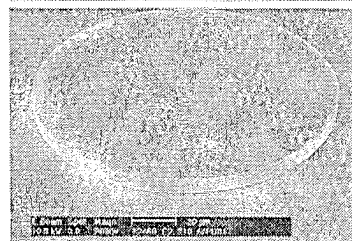


6um/min

Center

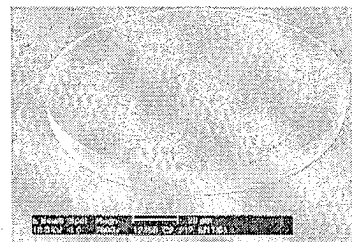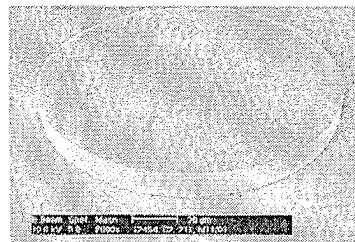

Edge

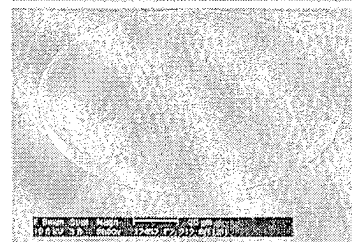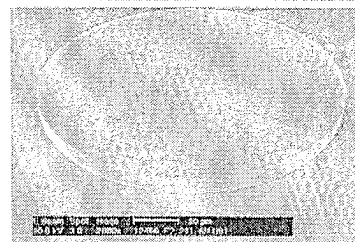

20%, 100Hz




DC

50%, 100Hz






Accelerator-containing bath  
4um/min

Center

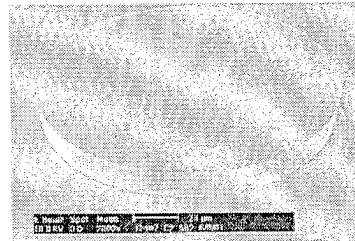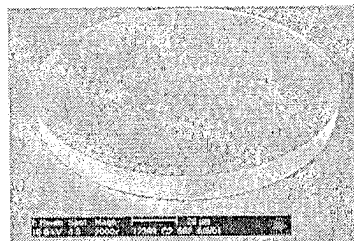
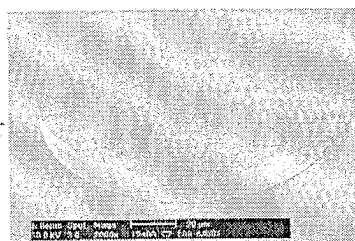


Edge

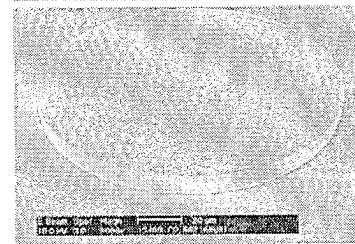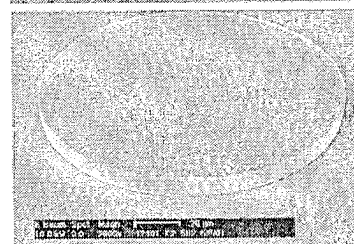
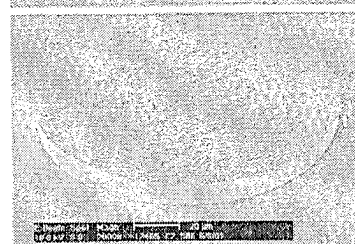


5um/min

Center

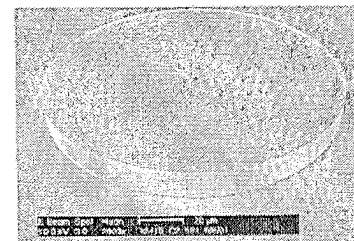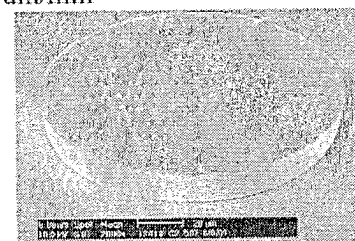



Edge

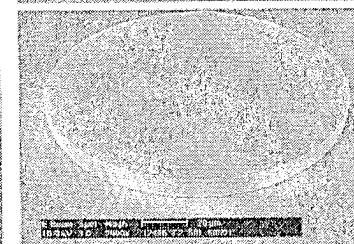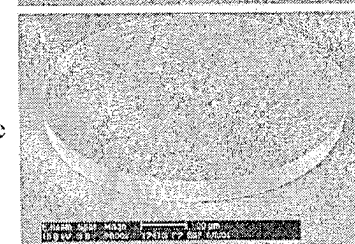



20%, 100Hz

6um/min

Center

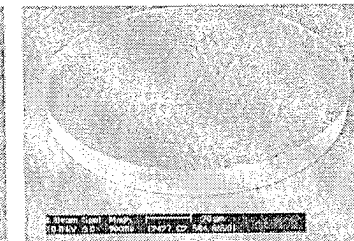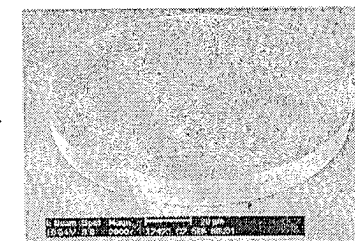

Edge

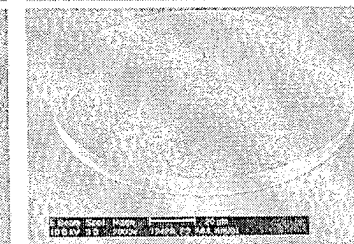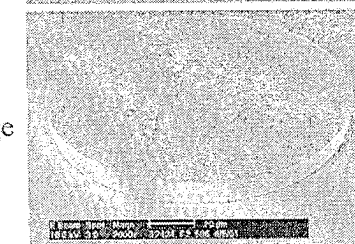

DC

50%, 100Hz